


USER DIRECTION OF FEED →

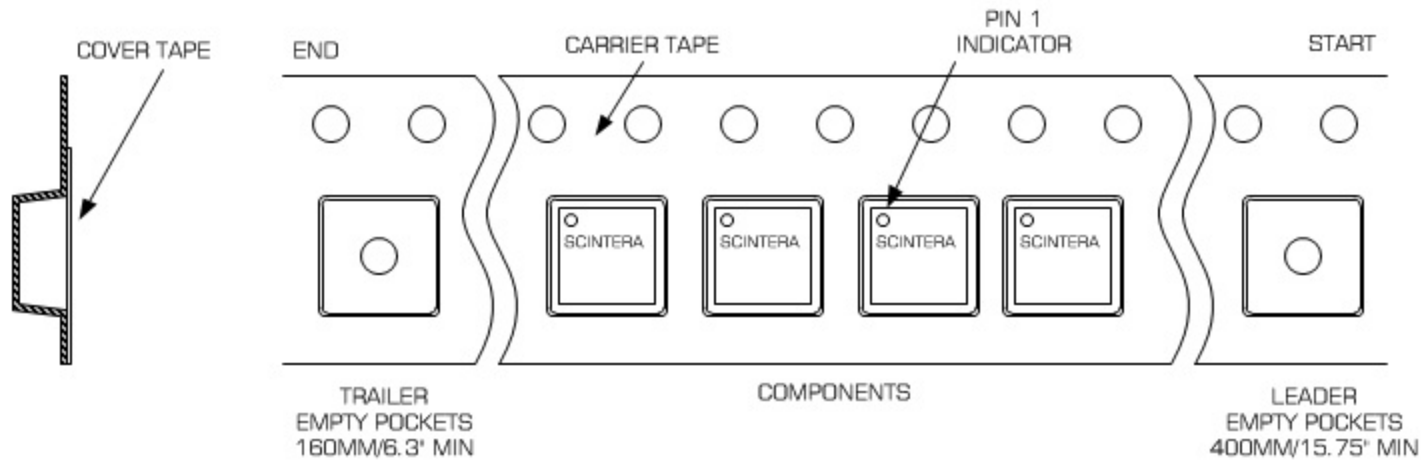

Ao	9.30 +/−0.1
Bo	9.30 +/−0.1
Ko	1.30 +/−0.1
K1	1.00 +/−0.1
F	7.50 +/−0.1
P1	12.00 +/−0.1
W	16.00 +/−0.3

- (I) Measured from centreline of sprocket hole to centreline of pocket.
- (II) Cumulative tolerance of 10 sprocket holes is ± 0.20 .
- (III) Measured from centreline of sprocket hole to centreline of pocket.
- (IV) Other material available.

ALL DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE STATED.



MATERIAL: CONDUCTIVE POLYSTYRENE (IV)		1st Angle 3rd Angle	REV	DESCRIPTION	DATE	APPROVED
DRAWN:		GENERAL TOLERANCE: ±0.1	0	NEW DRAWING	09/30/11	MMO
DRAWING NO: CP064/03-0		SCALE: NTS				
TITLE: OPEN TOOL EMBOSSED CARRIER TAPE DIMENSIONS LLP9X9X0.75 (BD0900X0900B)						